
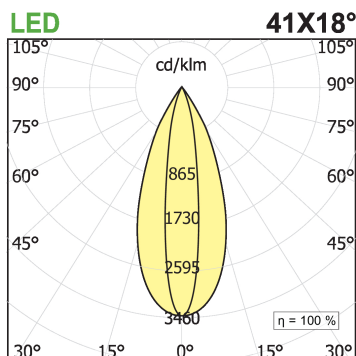
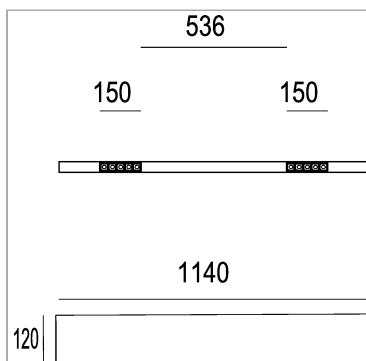


File H suspension profile with Leva modules

code F1H12.927ZD/01

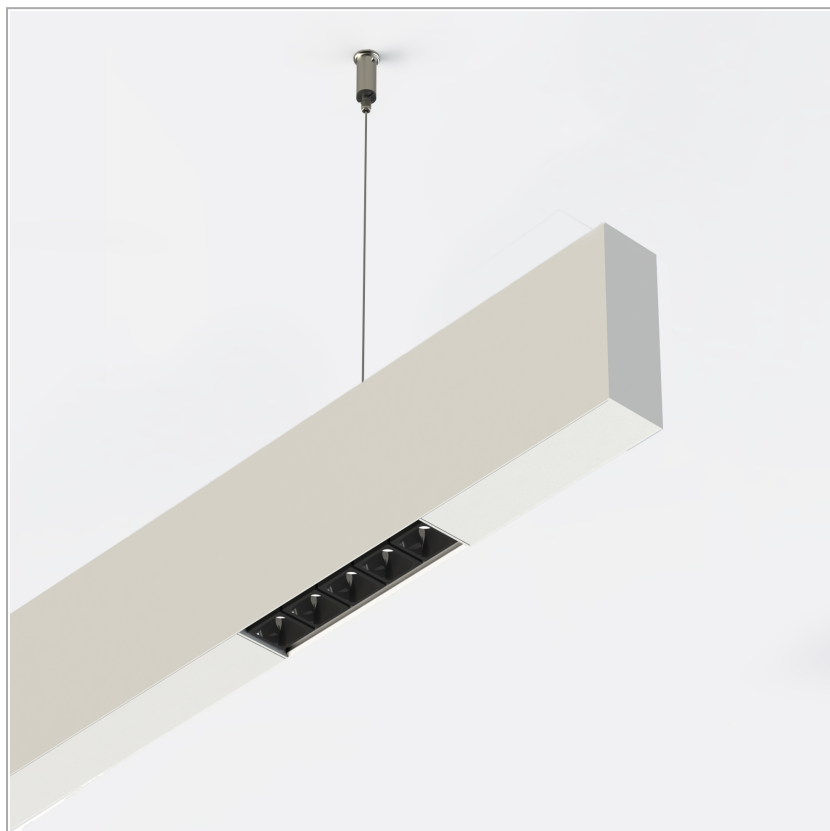

PRODUCT DESCRIPTION

Direct and indirect light indoor suspension lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Leva 5 spot series with high color rendering LED sources; temperature 2700K; fixed optics with aperture ; protocol Dimmable Dali. Lamp with finish: white box - black optic. Degree of protection IP20.Type of ceiling installation.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	22 W / 25,6 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric
Finishing	White box - black optic
Luminous flux of the product	2150 lm / 3968 lm
Luminous efficiency	98 lm/W / 155 lm/W
MacAdam color tolerance	2 / 3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C / 50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	D / E
Weight	2.40 Kg
Dimension	L1140 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1