


## File 30 Ceiling

code F3023.835P/01

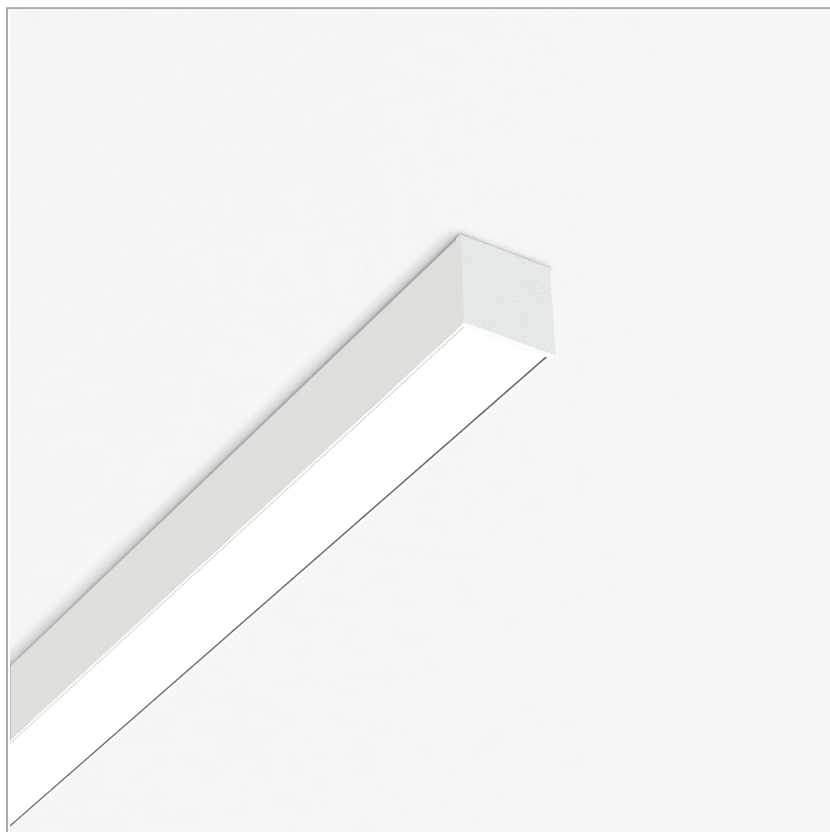

### PRODUCT DESCRIPTION

Direct and diffused ceiling/wall lamp, extruded aluminium profile 30x30mm, colour rendering index CRI>80. Epoxy powder coating, colour finish white. Product complete with end and side cast caps in the same finish. Degree of protection IP40. Requires remote system for electronic power supply.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Ceiling surface mounted     |
| Light source                 | Linea Led                   |
| Absorbed power               | 34,3 W                      |
| Color temperature            | 3500K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Opal polycarbonate diffuser |
| Finishing                    | White                       |
| Luminous flux of the product | 3389 lm                     |
| Luminous efficiency          | 99 lm/W                     |
| Weight                       | 1 Kg                        |
| Dimension                    | L1564 mm                    |
| IP Grade                     | IP40                        |
| Protection Class             | Class III appliance         |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |



### WEB PAGE



### ASSEMBLY INSTRUCTIONS



