

## Focus P26 plate

code FS201.927F/01




### PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, plate base with spring for hooking to plasterboard; powder coating or galvanic treatment; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Recessed with frame             |
| Light source                 | LED                             |
| Absorbed power               | 5,7 W                           |
| Color temperature            | 2700K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Flood 27°                       |
| Finishing                    | White                           |
| Luminous flux of the product | 566 lm                          |
| Luminous efficiency          | 99 lm/W                         |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Energy efficiency class      | E                               |
| Dimension                    | H85 Ø26 mm                      |
| Hole size                    | Ø 52 mm                         |
| IP Grade                     | IP20                            |
| Protection Class             | Class III appliance             |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

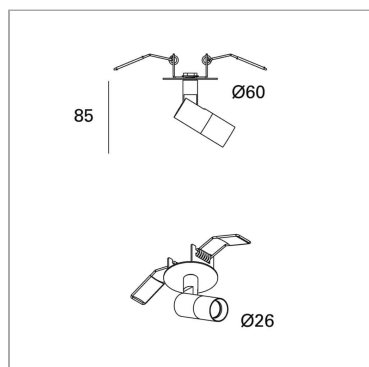

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **AE500.14C**



code AE500.14C

Electronic power supply current