


## Twenty 7 Minimal Fixed 2

code TW103.930W/01


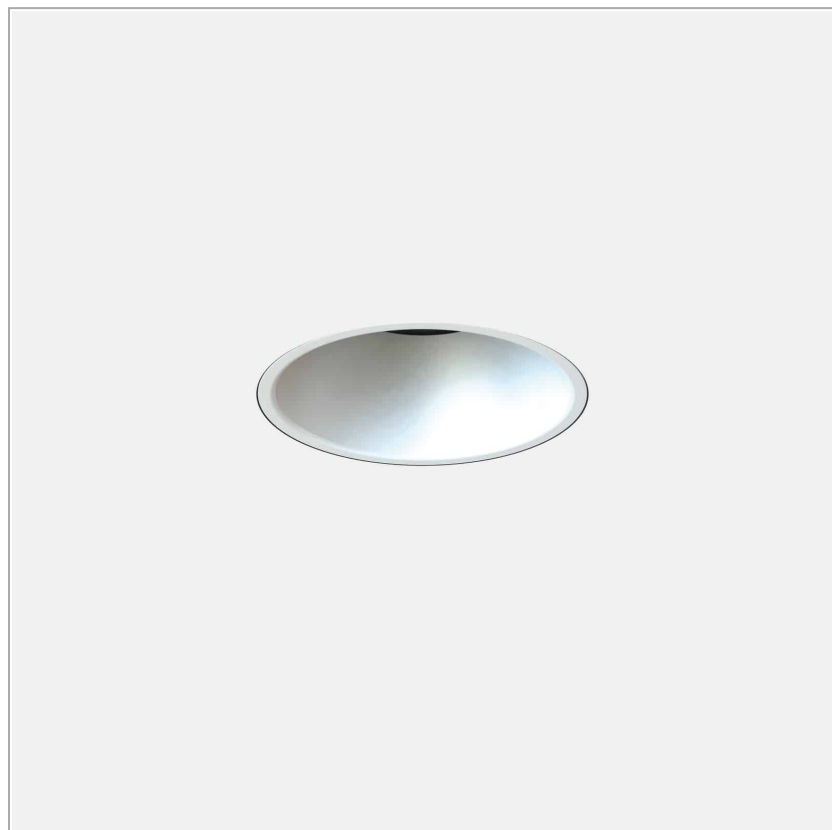


### PRODUCT DESCRIPTION

Recessed downlighters programme for chip on board LED sources. Conceived to get, by the insertion of accessories into the fixture body, 27 different lighting effects, as variations of the following three basic lighting emissions: spot, diffused, low luminance and asymmetrical. Round trimless version. Recessed downlighter with 355° vertically and +/-30° horizontally adjustable optical group. Fixture body and optical group in painted aluminum. Reflector coated with 99,99% pure aluminum. Conicshaped covers, to get accent, diffused, low luminance and asymmetrical lighting emission, provided with Click&Play magnetic lock-unlock system to optical group. Fresnel, transparent, satin and microprismatic lenses in polycarbonate, honeycomb grid in painted aluminum. Lower closure flat painted covers, provided with elliptical, square or round hole to hide from view the lighting fixture. Degree of protection IP23/43.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | Trimless recessed            |
| Light source                 | LED                          |
| Absorbed power               | 32 W                         |
| Color temperature            | 3000K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Wide 38°                     |
| Finishing                    | White                        |
| Luminous flux of the product | 3516 lm                      |
| Luminous efficiency          | 110 lm/W                     |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 3SDCM 50000h L90 B10 ta 25°C |
| Energy efficiency class      | E                            |
| Dimension                    | H160 Ø131 mm                 |
| Hole size                    | Ø 150 mm                     |
| IP Grade                     | IP20                         |
| Protection Class             | Class III appliance          |
| Product Spec                 | Circular shape               |
| Power supply/Transformer     | Not included                 |
| Protocol                     | See power supply             |

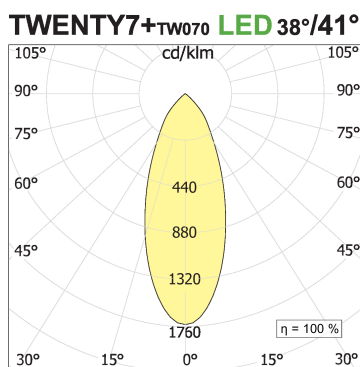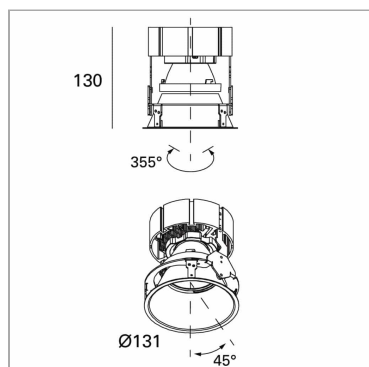

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Accessori Twenty 7 Minimal ring **COMPULSORY**



code TW001

Trimless recessed indoor

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori Lens ø 105 Asymmetric microprismatic 15° lens Ø 105



code L105A

uncategorized

Technical Sheet



### Accessori Lens ø 105 Ellipsoidal lens Ø 105



code L105E

uncategorized

Technical Sheet



### Accessori Lens ø 105 Honey comb louver Ø 105



code L105R

uncategorized

Technical Sheet



### Accessori Lens ø 105 Satin lens Ø 105



code L105S

uncategorized

Technical Sheet

