
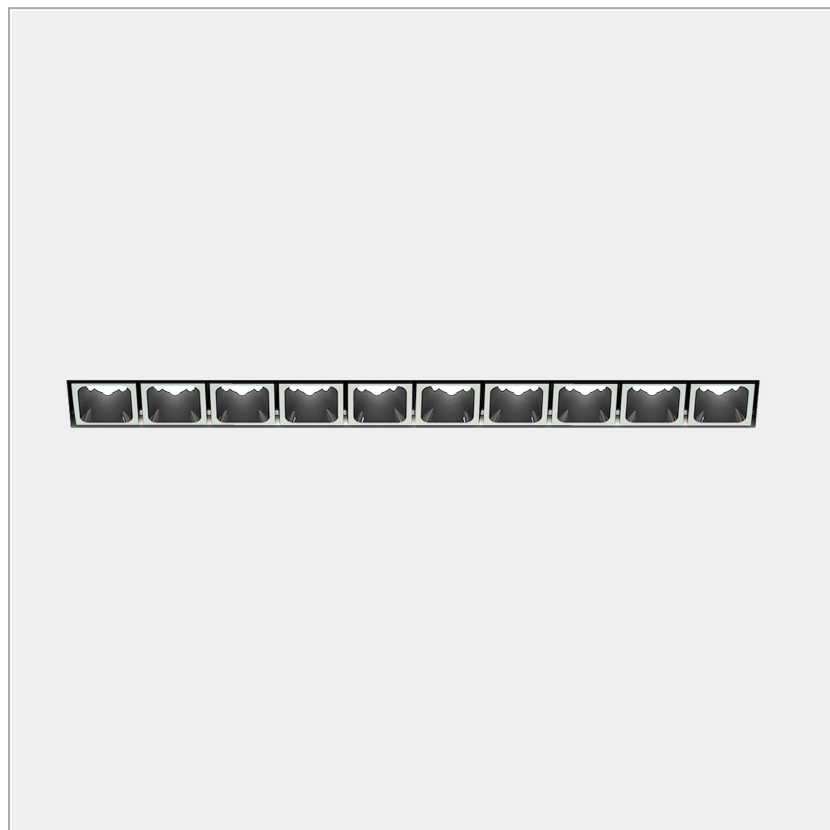


Leva 10 trimless recessed - kit

code LV010K.940Z/01





PRODUCT DESCRIPTION

Luminaire for integrated LED Chip On Board sources. Flush-mounted installation. Luminaire body in extruded painted aluminium white. Optical units complete with LED chip on board, lens, anti-glare housing. Optics 41°x18° UGR<16. Degree of protection IP20.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	10x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White
Luminous flux of the product	2220 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.20 Kg
Dimension	L300xW27xH60 mm
Hole size	32X306 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Rectangular shape
Power supply/Transformer	Not included
Protocol	See power supply

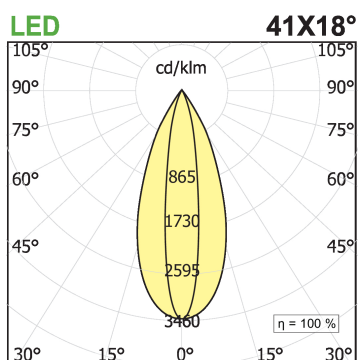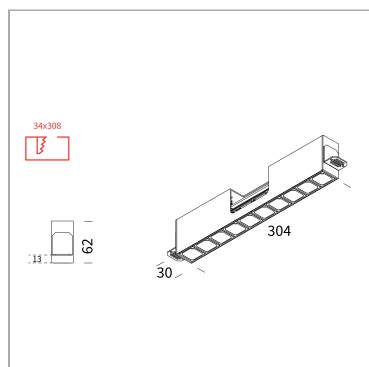

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Box Leva 10 trimless



code LV010A

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



AE700.32C1.MP



code AE700.32C1.MP

Electronic power supply current

OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete – Leva10



code CCLV10

Formwork for masonry and concrete, suitable for Leva10. Internal length 307mm - external length 309,4mm

Technical Sheet

