
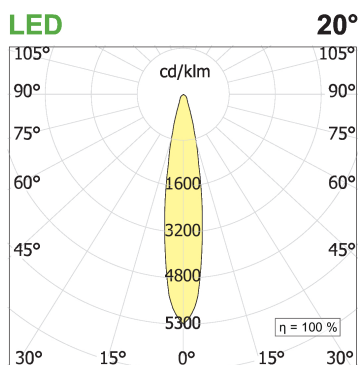


File profile recessed with Leva modules

code F1022.940SD/01

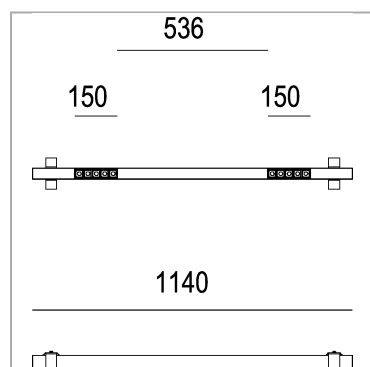

PRODUCT DESCRIPTION

Direct light indoor recessed lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 2 groups Leva 5 spot series with high color rendering LED sources; 22 W temperature 4000K; fixed optics with aperture 20°; protocol Dimmable Dali / Touch & Dimm. Lamp with finish: white box - black optic. Degree of protection IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	10x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 20°
Finishing	White box - black optic
Luminous flux of the product	2220 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali / Touch & Dimm
Energy efficiency class	E
Weight	1.7 Kg
Dimension	L1140 mm
Hole size	42xL+2 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1